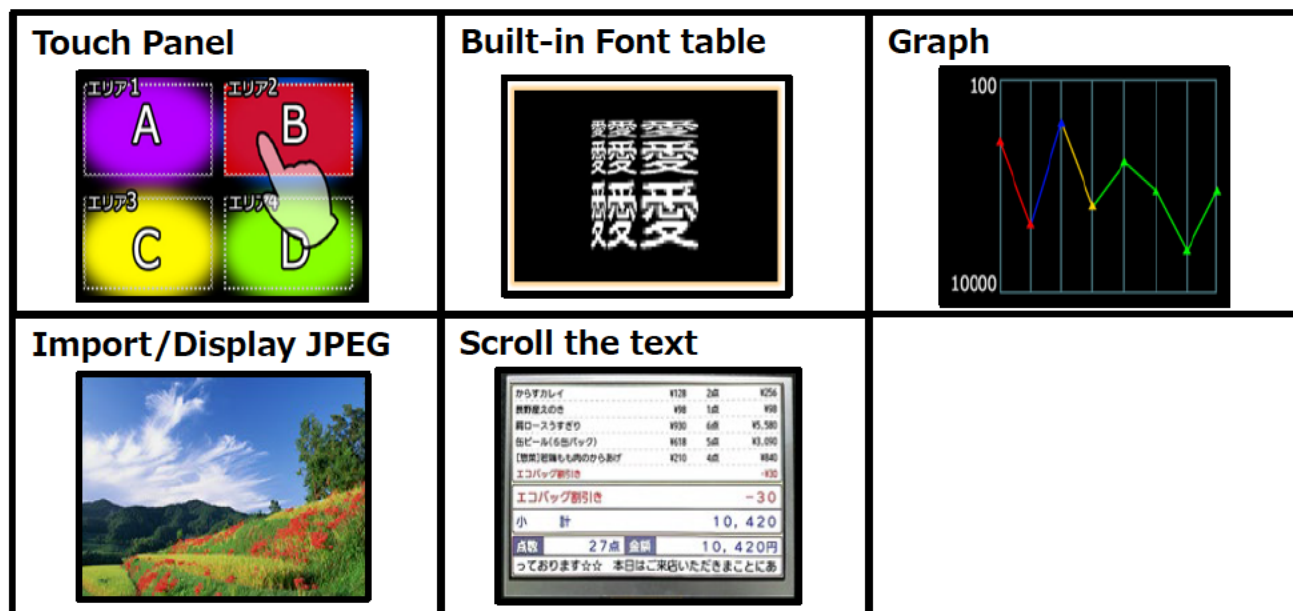


## ◆ Easy control of various function by command



## [Standard Model - Standard Product List]

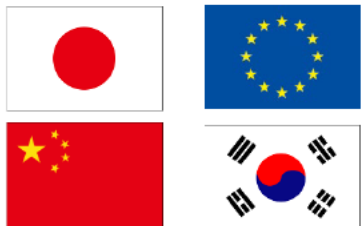



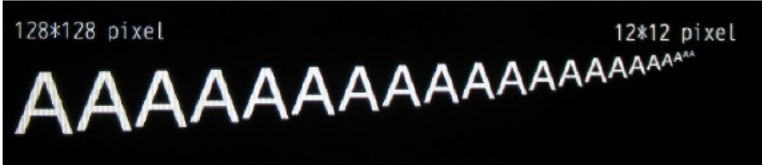
LCD	3.5 inch	4.3 inch	5.7 inch	7.0inch	10.1inch
Series	LC035LA0**	LC043LA0**	LC057LA1RD	LC070LA1** AH151C*(Case W/)	LC101LA1RC
Pixel	320xR/G/Bx240	480xR/G/Bx272	640xR/G/Bx480	800xR/G/Bx480	1280xR/G/Bx800
Viewing Area [mm]	72.88x55.36	98.9x57.7	117.2x88.4	157.02x89.26	219.96x138.6
Active Area [mm]	70.08x52.56	95.04x53.86	115.2x86.4	154.08x85.92	216.96x135.6
Operating Temperature Range [°C]	-10°C~+60°C	-20°C~+70°C	-10°C~+60°C	-20°C~+70°C 0°C~+40°C(Case W/)	-10°C~+50°C
Luminance [cd/m <sup>2</sup> ]	320 (with TP) 400 (without TP)	820(with TP) 1050(without TP)	400(with TP)	430(with TP) 550(without TP)	250(with TP)
Outer Dimension [mm]	W92xH67xT15.7 (with TP) W92xH67xT14.5 (without TP)	W120xH70xT15.45 (with TP) W120xH70xT14.2 (without TP)	W147.6xH100xT24.0 (with TP)	LC012C*: W167xH102.3x14.4 Case W/: W190xH122xT21.0	W246xH151.2xT22.4 (with TP)
Power Supply Voltage	DC5V/0.4A (Typ.)	DC5V/0.5A (Typ.)	DC5V/0.6A (Typ.)	DC5V/0.7A (Typ.)	DC12V/0.5A (Typ.)
Interface	3.5",4.3",7.0" : USB2.0 Full speed (HID class)、RS-232C (115.2kbps Max) *Selected from the lineup. 5.7" : USB2.0 Full speed (HID class)、RS-232C / UART (115.2kbps Max) 10.1" : USB2.0 Full speed (HID class)、RS-232C (115.2kbps Max)				
Touch Panel	3.5",4.3",7.0" : Resistive touch panel(Optional)				

### <Contact>

Futaba Corporation Tokyo Sales Office Akihabara Bldg. 5F, 19 Kandamatsunaga-cho Chiyoda-ku, Tokyo, 101-0023, Japan  
 TEL : 81-3-4316-4821 FAX : 81-3-4316-4823

URL <http://www.futaba.co.jp/>

## ◆ Additional function from standard model

<b>Multilingual Support</b> 	<b>Simple Movie Display</b> 	<b>SD Card</b> 
<b>Interface</b>  RS485	<b>Scalable Font</b> 	

## 【Middle Model - Standard Product List】

LCD	3.5 inch	4.3 inch	5.7 inch	7.0 inch	10.1 inch
Series	LC035MA1RE	LC043MA1RE	LC057MA1RE	LC070MA1RE	LC101MA1RE
Pixel	320xR/G/B x240	480xR/G/B x272	640xR/G/B x480	800xR/G/B x480	1280xR/G/B x800
Viewing Area [mm]	72.88x55.36	98.9x57.7	117.2x88.4	157.02x89.26	219.96x138.6
Active Area [mm]	70.08x52.56	95.04x53.86	115.2x86.4	154.08x85.92	216.96x135.6
Operating Temperature Range [°C]	-10°C~+60°C	-20°C~+70°C	-10°C~+60°C	-20°C~+70°C	-10°C~+50°C
Luminance [cd/m <sup>2</sup> ] ※with RTP	320	820	400	430	250
Outer Dimension [mm]	W96xH72 xT17.3	W124.6xH77 xT19.1	W147.6xH100 xT24.0	W167xH102.3 xT16.9	W250xH153.2 xT20.3
Power Supply Voltage	DC5V/0.4A (Typ.)	DC5V/0.5A (Typ.)	DC5V/0.6A (Typ.)	DC5V/0.7A (Typ.)	DC12V/0.5A (Typ.)
Interface	USB2.0 Full speed (HID class) , RS-232C (115.2kbps Max) , RS-485				
Touch Panel	Resistive touch panel (Standard) Capacitive touch panel (Option)				

### <Contact>

Futaba Corporation Tokyo Sales Office Akihabara Bldg. 5F, 19 Kandamatsunaga-cho Chiyoda-ku, Tokyo, 101-0023, Japan  
 TEL : 81-3-4316-4821 FAX : 81-3-4316-4823

URL <http://www.futaba.co.jp/>